


R12F - FC /UPC / SM /  $\Phi$ 09 - 3 /05 M



R 6F-FC /UPC / SM /  $\Phi$ 2- 3 /06 M

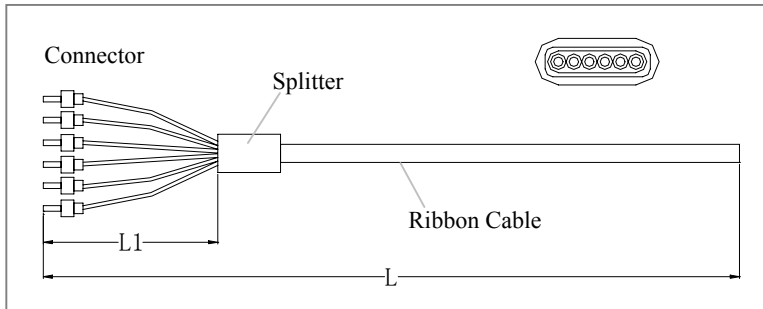

● **Technical Specification**

Item	Specification
Applicable Fibers	SM, MM ( 50/125um, 62.5/125um )
Fiber Count	4, 6, 8 12 & 24 Fibers
Cord Diameter	2mm, 0.9mm ( 09mm )
Applicable Connector	FC, SC, MU, LC / PC, UPC, APC

● **Ordering Instructions**

**Ribbon Fanout R 12F-FC /UPC / SM /  $\Phi$ 09- L / L1 M**

① ② ③ ④ ⑤ ⑥ ⑦ ⑧

① Cable	R: Ribbon Cable
② Fiber Count	4, 6, 8, 12 & 24 Fibers
③ Connector Type	FC, SC, ST, MU, LC
④ End Face	PC, UPC, APC
⑤ Fiber Mode	SM=Single Mode, MM =Multi Mode
⑥ Cord Diameter	$\Phi$ 2, $\Phi$ 0.9
⑦ Cable Length	L=1,2,3,4... M=Meter i.e., 5M=5 Meter
⑧ Pigtail Length	L1=01,02,03,04... M=Meter i.e., 05M= 0.5Meter