



## SoftBend™ Fiber – Accessories (G.657A)

FibreOptica's SoftBend™ Fiber patchcord and pigtails adopting ITU-T G.657A type of fiber are new accessories designed for the need of the next-generation FTTH and FTTD. The SoftBend™ Fiber accessories include three series: FSB-I, FSB-II and FSB-III.

**FSB-I:** metallic armoured indoor patchcord series

**FSB-II:** Non-metal patchcord series

**FSB-III:** pigtail series

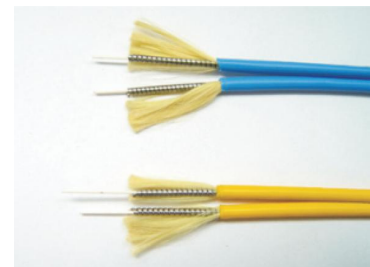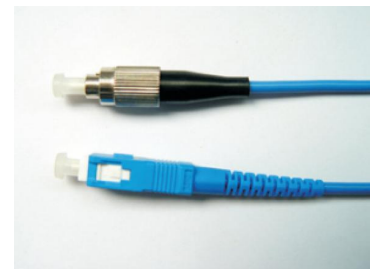

### Specifications

Item	PC	UPC	APC
Material	Ceramic		
Insert Loss (dB)	< 0.2	< 0.2	< 0.2
Return Loss (dB)	≥ 45	≥ 55	≥ 60
Fiber Type	G.657A		
Repeatability (500times) (dB)	Δ 0.2		
Tensile Strength (N)	70 (Armored 200, SC)		
Working Temperature	-20 to +80°C		
Storage Temperature	-20 to +80°C		
Working Humidity	< 90% RH		

### Ordering Information

